


8098U

800W Modified Sine Wave Inverter

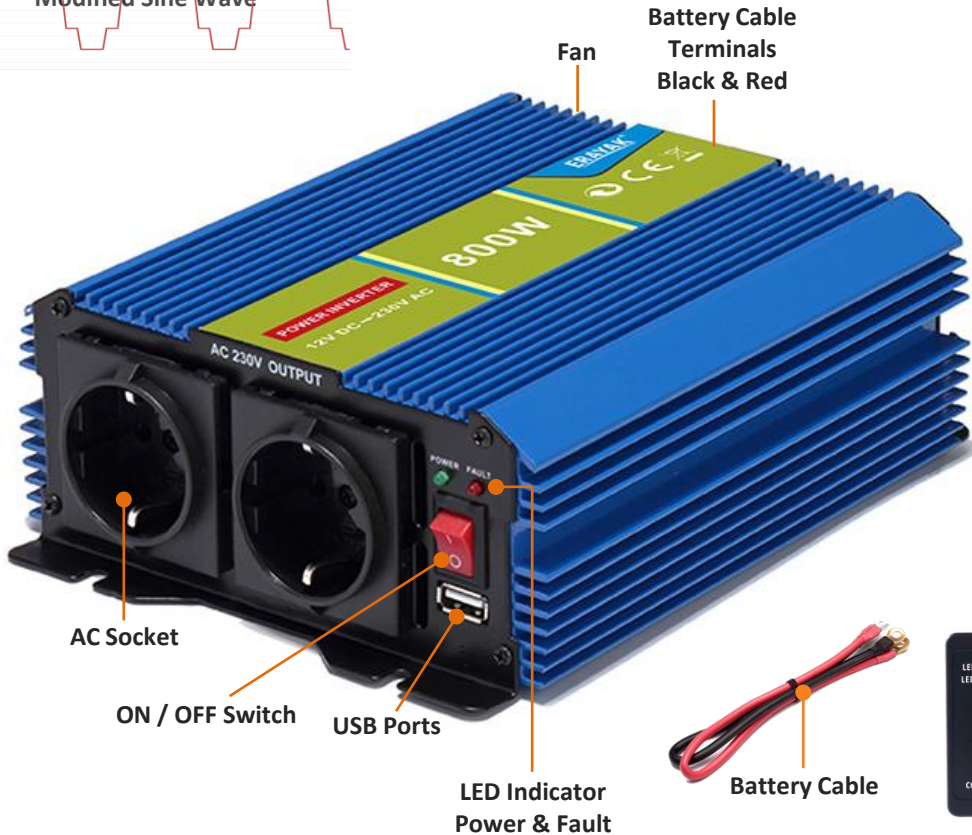

Remote Control Switch & Cable (optional)

Compact 800W Modified Sine Wave Inverter

The ERAYAK 8098U is a professional grade 800 watts pure sine wave inverter providing up to 1600 watts of peak power. It allows you to power office equipment and most household appliances such as TVs, Fans, and mini fridges right from your car, truck, RV, or boat.



Product Features:

- Modified sine wave output
- High frequency and efficient with small size
- 100% real power
- Input & output fully isolation
- Microprocessor control system
- Smart temperature controlled cooling fan
- Sturdy and durable aluminum alloy case
- USB port for charging most mobile devices (optional type-A & type-C)
- LED status indicators
- Optional Remote controller
- Dual AC output sockets
- Input protection : Reverse polarity (fuse) / Under voltage / Over voltage
- Output protection : Short circuit / Overload / Over temperature

Model	8098U1	8098U2
Continuous power	800W	
Peak power	1600W	
No-load output voltage (@ Rated input voltage)	AC 230V +/- 10V	
Load output voltage (@ Rated input voltage)	AC 210V -240V	
Frequency	50Hz +/- 3Hz , 60Hz +/- 3Hz	
USB output (optional Type-A or C)	Type-A (DC 5V,2100mA) , Type-C (18W max.)	
Output wave	Modifies Sine Wave	
Rated input voltage	DC 13V +/- 0.2V	DC 26V +/- 0.4V
Operating voltage range	DC 11V - 15V	DC 22V - 30V
NO load current	≤0.4A	≤0.4A
Max. efficiency	≥85%	
Input low-voltage alarm	DC 10.5V +/- 0.3V	DC 21V +/- 0.4V
Input low-voltage protection	DC 9.5V +/- 0.3V	DC 19V +/- 0.4V
Input over-voltage protection	DC 16V +/- 0.3V	DC 32V +/- 0.4V
Over-load protection	900W - 1100W	
Over Temp. protection	Yes, Shutdown output	
Output Short Circuit protection	Yes, Shutdown output	
DC Input reverse polarity	Yes, by fuse	
Operating Temp.	-15°C ~ +25°C ; 60°C @ 40% power load	
Storage Temp. & Humidity	-30°C ~ +70°C , 10 ~ 95% RH	
Dimension (L x W x D)	207*165*69mm	
Packing	Color box , 5 pcs/ctn , 59.5*25.5*23.5cm	

